

TITUS®




Model TMR Round Ceiling



- Model TMR round ceiling diffuser is designed for both heating and cooling applications.
- All sizes have three cones, giving a uniform appearance where different sizes are used in the same area.
- Uniform 360° discharge pattern.
- Excellent performance in variable air volume systems.
- The two horizontal discharge settings allow the diffuser to be adjusted for two different flow rate conditions. At Position 1, maximum capacity is obtained. At Position 2, induction is increased.
- Adjustment achieved by removing the two inner cones as a unit and repositioning six screws.
- Spring lock allows easy removal and replacement of the two inner cones.
- Material is steel.

This Product Includes:

- Standard Finish:
#26 White

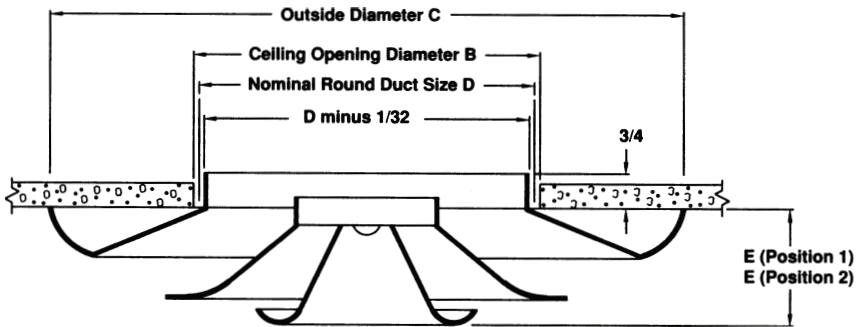

Note: Position 1 is with cones down. Position 2 is with cones up.

Nominal Round Duct Size D	B	C	E (Pos. 1)	E (Pos. 2)
6	6 1/2	11 1/8	1 3/4	1 1/8
8	8 1/2	14 3/4	2 1/8	1 1/2
10	10 1/2	18 1/4	2 7/8	2 1/8
12	12 1/2	22	3 1/8	2 3/8
14	14 1/2	26	3 3/8	2 5/8

LIST PRICES

Part Number	Neck Size	Frame	CFM @ NC 30	Diffuser List Price	Damper List Price
TMR6	6"	Std.	190	\$78.00	\$15.00
TMR8	8"	Std.	280	\$82.00	\$17.00
TMR10	10"	Std.	420	\$90.00	\$19.00
TMR12	12"	Std.	630	\$102.00	\$19.00
TMR14	14"	Std.	800	\$116.00	\$29.00

Size 6 through 14 use the D-100 damper.
See page GRD-16.0 for damper details.